

STATIONARY IRRIGATOR ON SLED

- Sturdy Galvanised Frame
- High quality Sime Canon gun
- Adjustable riser pipe to ensure canon is always vertical
- Selection of nozzles supplied



STATIONARY IRRIGATOR ON WHEELS

- Sturdy Galvanised Trailer with stand
- High quality Sime Canon gun
- Adjustable riser pipe to ensure canon is always vertical
- Selection of nozzles supplied




STATIONARY IRRIGATOR SPECIFICATIONS

U Nozzle Diameter		P Pressure		G Jet Length		Q Capacity			O Values for a single sprinkler	
									S Irrigated area surface	I Liquid per hour
Available Nozzles Ø 12 - 20mm										
mm	Inch	kg/cm ²	lbs/inch	m	feet	l/min	m ³ /h	G.P.M.	m ²	mm/h
12	.47	1.5	22	19	62	130	7.8	34.3	1133	6.9
		2.0	29	22	72	152	9.1	40.2	1520	6.0
		3.0	44	24	78	182	10.9	48.1	1808	6.0
		4.0	56	27	88	211	12.6	55	2289	5.6
14	.55	2.0	29	23	75	195	11.7	51.5	1661	7.0
		3.0	44	28	91	239	14.3	63.2	2461	5.8
		4.0	56	31	101	277	16.6	73.2	3017	5.5
		5.0	70	34	111	309	18.5	81.7	3631	5.1
16	.63	2.0	29	24	78	247	14.8	65.3	1808	8.2
		3.0	44	30	98	303	18.2	80.1	2826	6.4
		4.0	56	34	111	351	21.0	92.8	3631	5.8
		5.0	70	36	118	391	23.4	103	4069	5.7
18	.71	2.0	29	24	78	309	18.5	81.7	1808	10.2
		3.0	44	32	105	378	22.7	100	3215	7.0
		4.0	56	35	115	436	26.2	115	3846	6.8
		5.0	70	38	125	487	39.2	128	4354	6.5
20	.78	2.0	29	25	82	376	22.5	99.4	1962	11.4
		3.0	44	33	100	460	27.6	121	3419	8.0
		4.0	56	37	122	532	31.9	140	4298	7.4
		5.0	70	41	135	594	35.6	157	5281	6.8

NUMEDIC

superior dairy technology

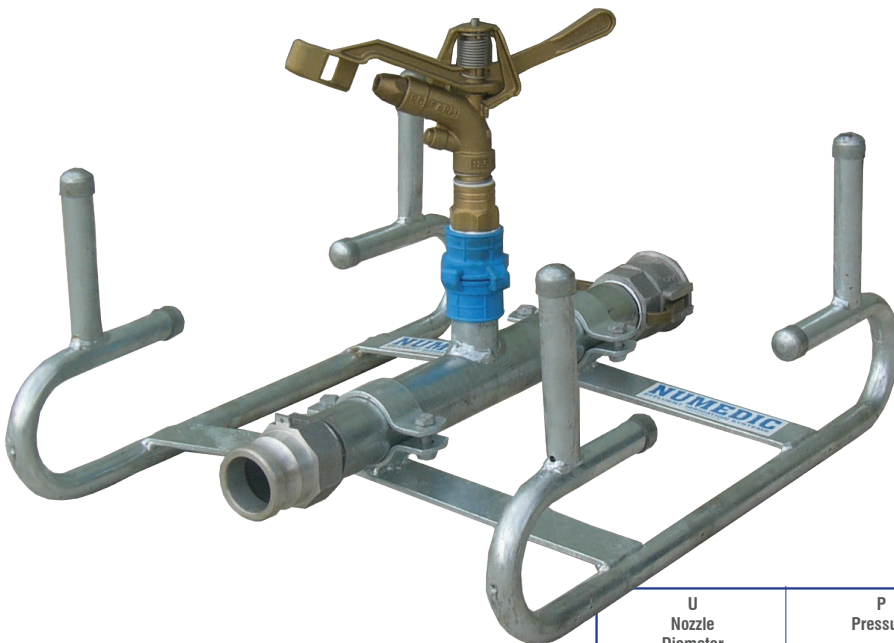

NU POD SPRINKLER

- Robust Galvanised Frame
- Quality Sprinkler
- Quick release fittings
- Camlock set supplied
- Selection of nozzles sizes

NU POD SPECIFICATIONS

U Nozzle Diameter		P Pressure		G Jet Length	Q Capacity		O Values for a single sprinkler	
							S Irrigated area surface	I Liquid per hour
mm	Inch	bar	psi	m	l/min	m ³ /h	m ²	mm/h
Available Nozzles Ø 10 - 14mm								
10	.40	3.0	44	22.6	114	6.85	1603	4.2
		3.5	50	23.6	123	7.40	1749	4.2
		4.0	56	24.6	132	7.92	1900	4.2
		4.5	62	25.4	140	8.40	2025	4.1
11	.47	3.0	44	23.7	138	8.30	1763	4.7
		3.5	50	24.7	149	8.96	1916	4.7
		4.0	56	25.7	160	9.58	2074	4.6
12	.55	4.5	62	26.5	169	10.16	2205	4.6
		3.0	44	24.4	164	9.87	1869	5.3
		3.5	50	25.6	178	10.66	2058	5.2
13	.63	4.0	56	26.6	190	11.40	2222	5.1
		4.5	62	27.5	201	12.09	2275	5.3
		3.0	44	25.1	193	11.59	1978	5.9
14	.71	3.5	50	26.5	209	12.52	2205	5.7
		4.0	56	27.6	223	13.38	2392	5.6
		4.5	62	28.5	236	14.19	2550	5.6
		3.0	44	25.7	224	13.44	2074	6.5
14	.71	3.5	50	27.3	249	14.52	2340	6.2
		4.0	56	28.5	259	15.52	2550	6.1
		4.5	62	29.6	274	16.46	2751	6.0



EFFLUENT FILTER

- Eliminates blockages at the Irrigator or Sprinkler
- Robust Heavy Duty Cylinder
- Range of mesh sizes available
- Quick release lid, simple to open and simple to close
- Galvanised fittings and pressure release valve fitted

Effluent Pumps, Stirrers, Pontons & Hydrants EVENSREAD Travelling Irrigators Power Drenching & Teat Spray Systems

Phone: 0800 686 334 Fax: 07 347 9975 Email: info@numedic.co.nz Web: www.numedic.co.nz